



ALLNET


ALL-CAM2388-LVE-Wallmount_Junc

Wall Mounting Bracket for Mini Dome Camera (with Junction Box)

- Aluminum alloy material with surface spray treatment
- The outlet hole makes the feature looks better
- Better water proof design
- The matched junction box has the waterproof pad

Art. Nr. 133772

Dimension

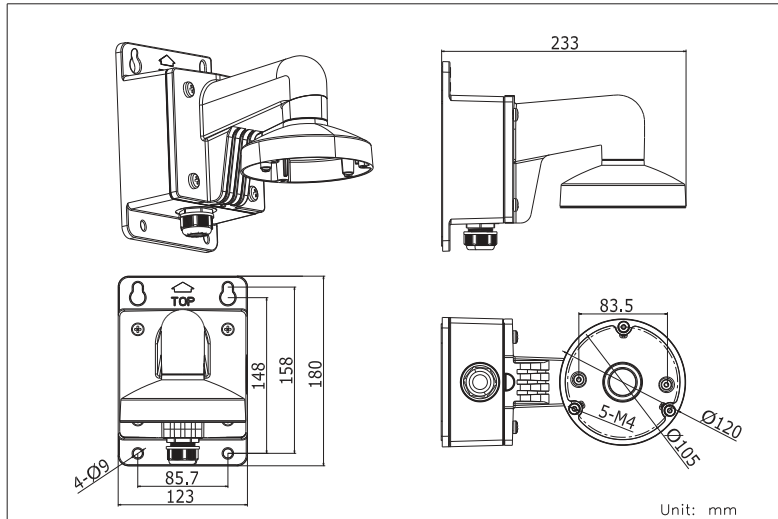

Order Model

ALL-CAM2388-LVE-Wallmount_Junc

Parameter


Model	ALL-CAM2388-LVE-Wallmount_Junc
Parameters	Wall Mounting Bracket for Mini Dome Camera (with Junction Box)
Appearance	White
Range of Application	Suitable for dome camera wall mounting
Material	Aluminum Alloy
Dimension	123×180×233mm
Weight	1225g

Notice


- Pay attention to the color matching when select bracket
- The bracket should be installed on flat wall
- The waterproof pad has to be kept when installing
- The wall must be capable of supporting over 3 times as much as the total weight of the camera and the mount.
- The maximum load capacity of the bracket is 4.5KG

Installation Step


- ① Choose the appropriate wall and thread the wire through the waterproof stopper




- ② Fix the bracket to junction box, thread the wire and screw up

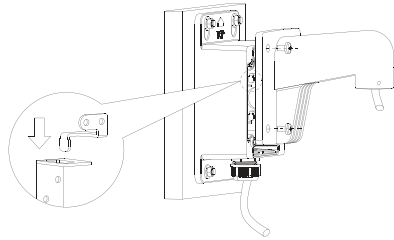


- ③ Install the bowl to the bracket and fix with fastening screw




- ④ Get off the transparent cover and check the hole site of adapter plate

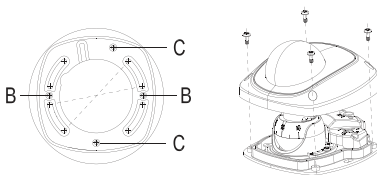


- ⑤ Install the combination to the bracket and complete the installation




- ⑥ Connect the camera wire and fix the camera onto the adapter plate



- ⑦ Modify the angle of monitoring, install the transparent cover and screw up



- ⑧ Bracket Installation complete.



Note: The actual bracket may vary from the picture above.