





**IVE COPPER
PLATE**

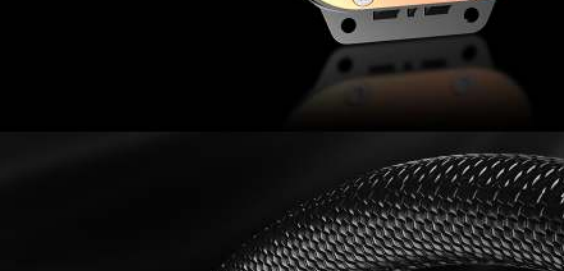

TUBING

The elastic and durable EPDM high-density tube makes the minimal evaporation of liquid.

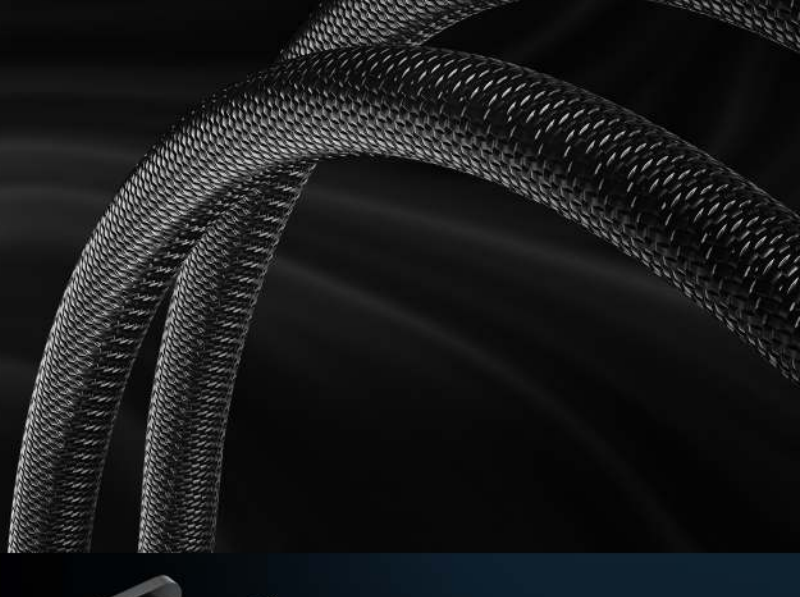

tionality and strong cooling performance



Airflow | 71.5 CFM


THE

The include



Mode Control
Long press for 3 seconds to switch to motherboard control and single


SATA Connector

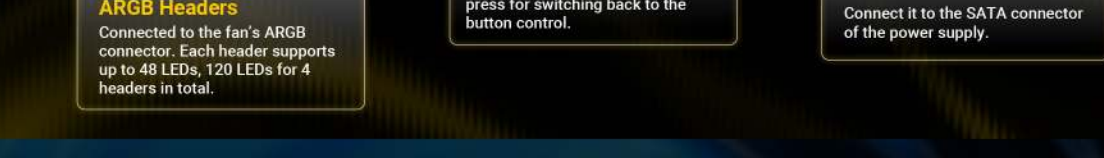

CPU SOCKET COMPATIBILITY

AMD compatibility : AM3 / AM4 / AM5 / TR4

Color calibration bar and technical data.

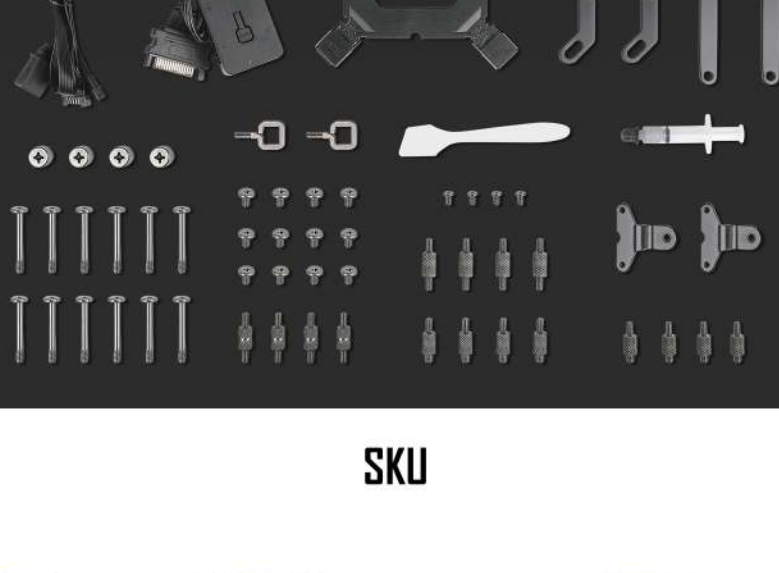

360 A



Cooling Type



Water Cooling



Dimensions	120 x 120 x 25 mm
Bearing Type	Hydraulic Bearing
LED Type	Addressable RGB
Fan Speed	800 ± 200 ~ 1800 ± 10% RPM
Airflow	71.5 CFM
Air Pressure	2.45 mmH ₂ O
Fan Noise Level	31 dB(A)
Lifespan	40,000 hours
Connector	PH2.0 7pin (PWM+ARGB)
Rated Voltage	FAN: DC 12 V LED: DC 5 V
Operation Voltage	FAN : DC 10.8 - 13.2 V LED : DC 4.5 - 5.5 V
Rated Current	FAN : 0.20 - 0.25 A LED : 0.32 A
RADIATOR	
Dimensions	397 x 120 x 27 mm
Material	Aluminum
PUMP	
Dimensions	Φ 67*48.5 mm
Rating Voltage	DC 12 V
Minimum Startup Voltage	≥ 5.0 V
Fan Speed	2800 ± 10% RPM
Rated Current	0.25 ± 20% A
Consumed Power	3.0 W
Flow Rate	≥ 1300 mL/min
Water Pressure	1.4M
Operation Temperature	-10°C ~ + 60°C
Noise Level	≤ 28 dB(A)
Lifespan	40,000 hours
Connector	PUMP : 3-pin LED : 3-pin
MISCELLANEOUS	
Socket Compatibility CPU	AMD : AM3 / AM4 / AM5 / TR4 Intel : LGA 115X / 1200 / 1700 / 1851 / 20XX
TDP	≤280W
Warranty	3 Years
UPC#	0-761345-40055-8